


3 layers of water protection.

Now with the new deck seal technology

- 1 Introducing a third layer of water protection. The pre-attached deck seal on all deck mounted skylights provides a foam seal between the frame and roof deck for leak-proof installation.
- 2 Adhesive underlayment for secondary water protection against the harshest weather conditions.
- 3 Engineered flashing for easy installation and primary water protection.



Deck mounted skylight size chart (Rough openings)



Inch	mm	21	22 1/2	30 1/16	44 1/4	
mm		533	572	763	1123	
22 15/16	582	FS				
26 7/8	682	FS, VS, VSE			FS, VS, VSE	
30	762	101 C01		302 M02	601 S01	
37 7/8	962	FS, VS, VSE		FS, VS, VSE		
45 3/4	1162	FS, VS, VSE	FS	FS, VS, VSE	FS, VS, VSE	
54 7/16	1382	056 A06	106 C06	156 D06	306 M06	606 S06
70 1/4	1784	FS, VS, VSE		FS, VS, VSE		
		108 C08		308 M08		
		FS				
		112 C12				

Small figures in chart are the old model sizes

Deck mounted skylight flashing

Model	Installation	Roofing
EDL	Single	Shingle/Slate (14°- 85° roof pitch)
EDW	Single	Tile (14°- 85° roof pitch)
EDM	Single	Metal (14°- 85° roof pitch)
EKL	Gang	Shingle/Slate (14°- 85° roof pitch)
EKW	Gang	Tile (14°- 85° roof pitch)
ECB*	Low pitch; single	Site built curb (14°- 85° roof pitch)

* Does not come with VELUX adhesive skylight underlayment, and is not covered by the No Leak Warranty.



www.thenoleaskylight.com

Deck mounted skylight codes

FS C06 2004

Model	Sizes	Interior finish	Cladding	Glazings
FS	A06	0 Natural wood	0 Aluminum	04 Low E/ Lami (74)
VS	C01	2 White	1 Copper	05 Low E/ Temp (75)
VSE	C04	9 Special	9 Special	06 Impact
	C06			08 White lami
	C08			10 Snowload
	C12			99 Special
	D06			
	M02			
	M04			
	M06			
	M08			
	S01			
	S06			

Deck mounted roller blinds

New model (A21)	Old model	Description
RFD	RAF	Manual for model FS
RMD	---	Electric for model FS
RSD	---	Solar for model FS
RSH	---	Solar for model VS
RMH	---	Electric for model VSE

Deck mounted blackout blinds

New model (A21)	Old model	Description
DKD	---	Manual for model FS
DMD	DMF	Electric for model FS
DSD	DSF	Solar for model FS
DSH	---	Solar for model VS
DMH	DMA	Electric for model VSE

Deck mounted venetian blinds


New model (A21)	Old model	Description
PAD	PFF	Manual for model FS
PMD	PMF	Electric for model FS
PMH	PMA	Electric for model VSE

Deck mounted optional accessories and controls

New model (A21)	Old model	Description
ZZZ 201	ZZZ 169W	Crank handle
ZZZ 202	ZZZ 179W	Replacement hook
ZZZ 203	---	Eyelet with universal joint
ZZZ 208	---	2" Handle extension
ZCT/ZMT 300	ZCT/ZMT 300	Telescopic rod
KLC 500	WLC 160	Power supply
KLI 110	WLI 160	Wall keypad
KLR 100	WLR 160	RF remote
KLF 100	---	Interface beacon
KLB 100	---	Battery backup
ZZZ 213	ZZZ 189	Trim kit

No leak skylight
10-year product and installation warranty

The No Leak Skylight
• No Leak Promise • No Worries

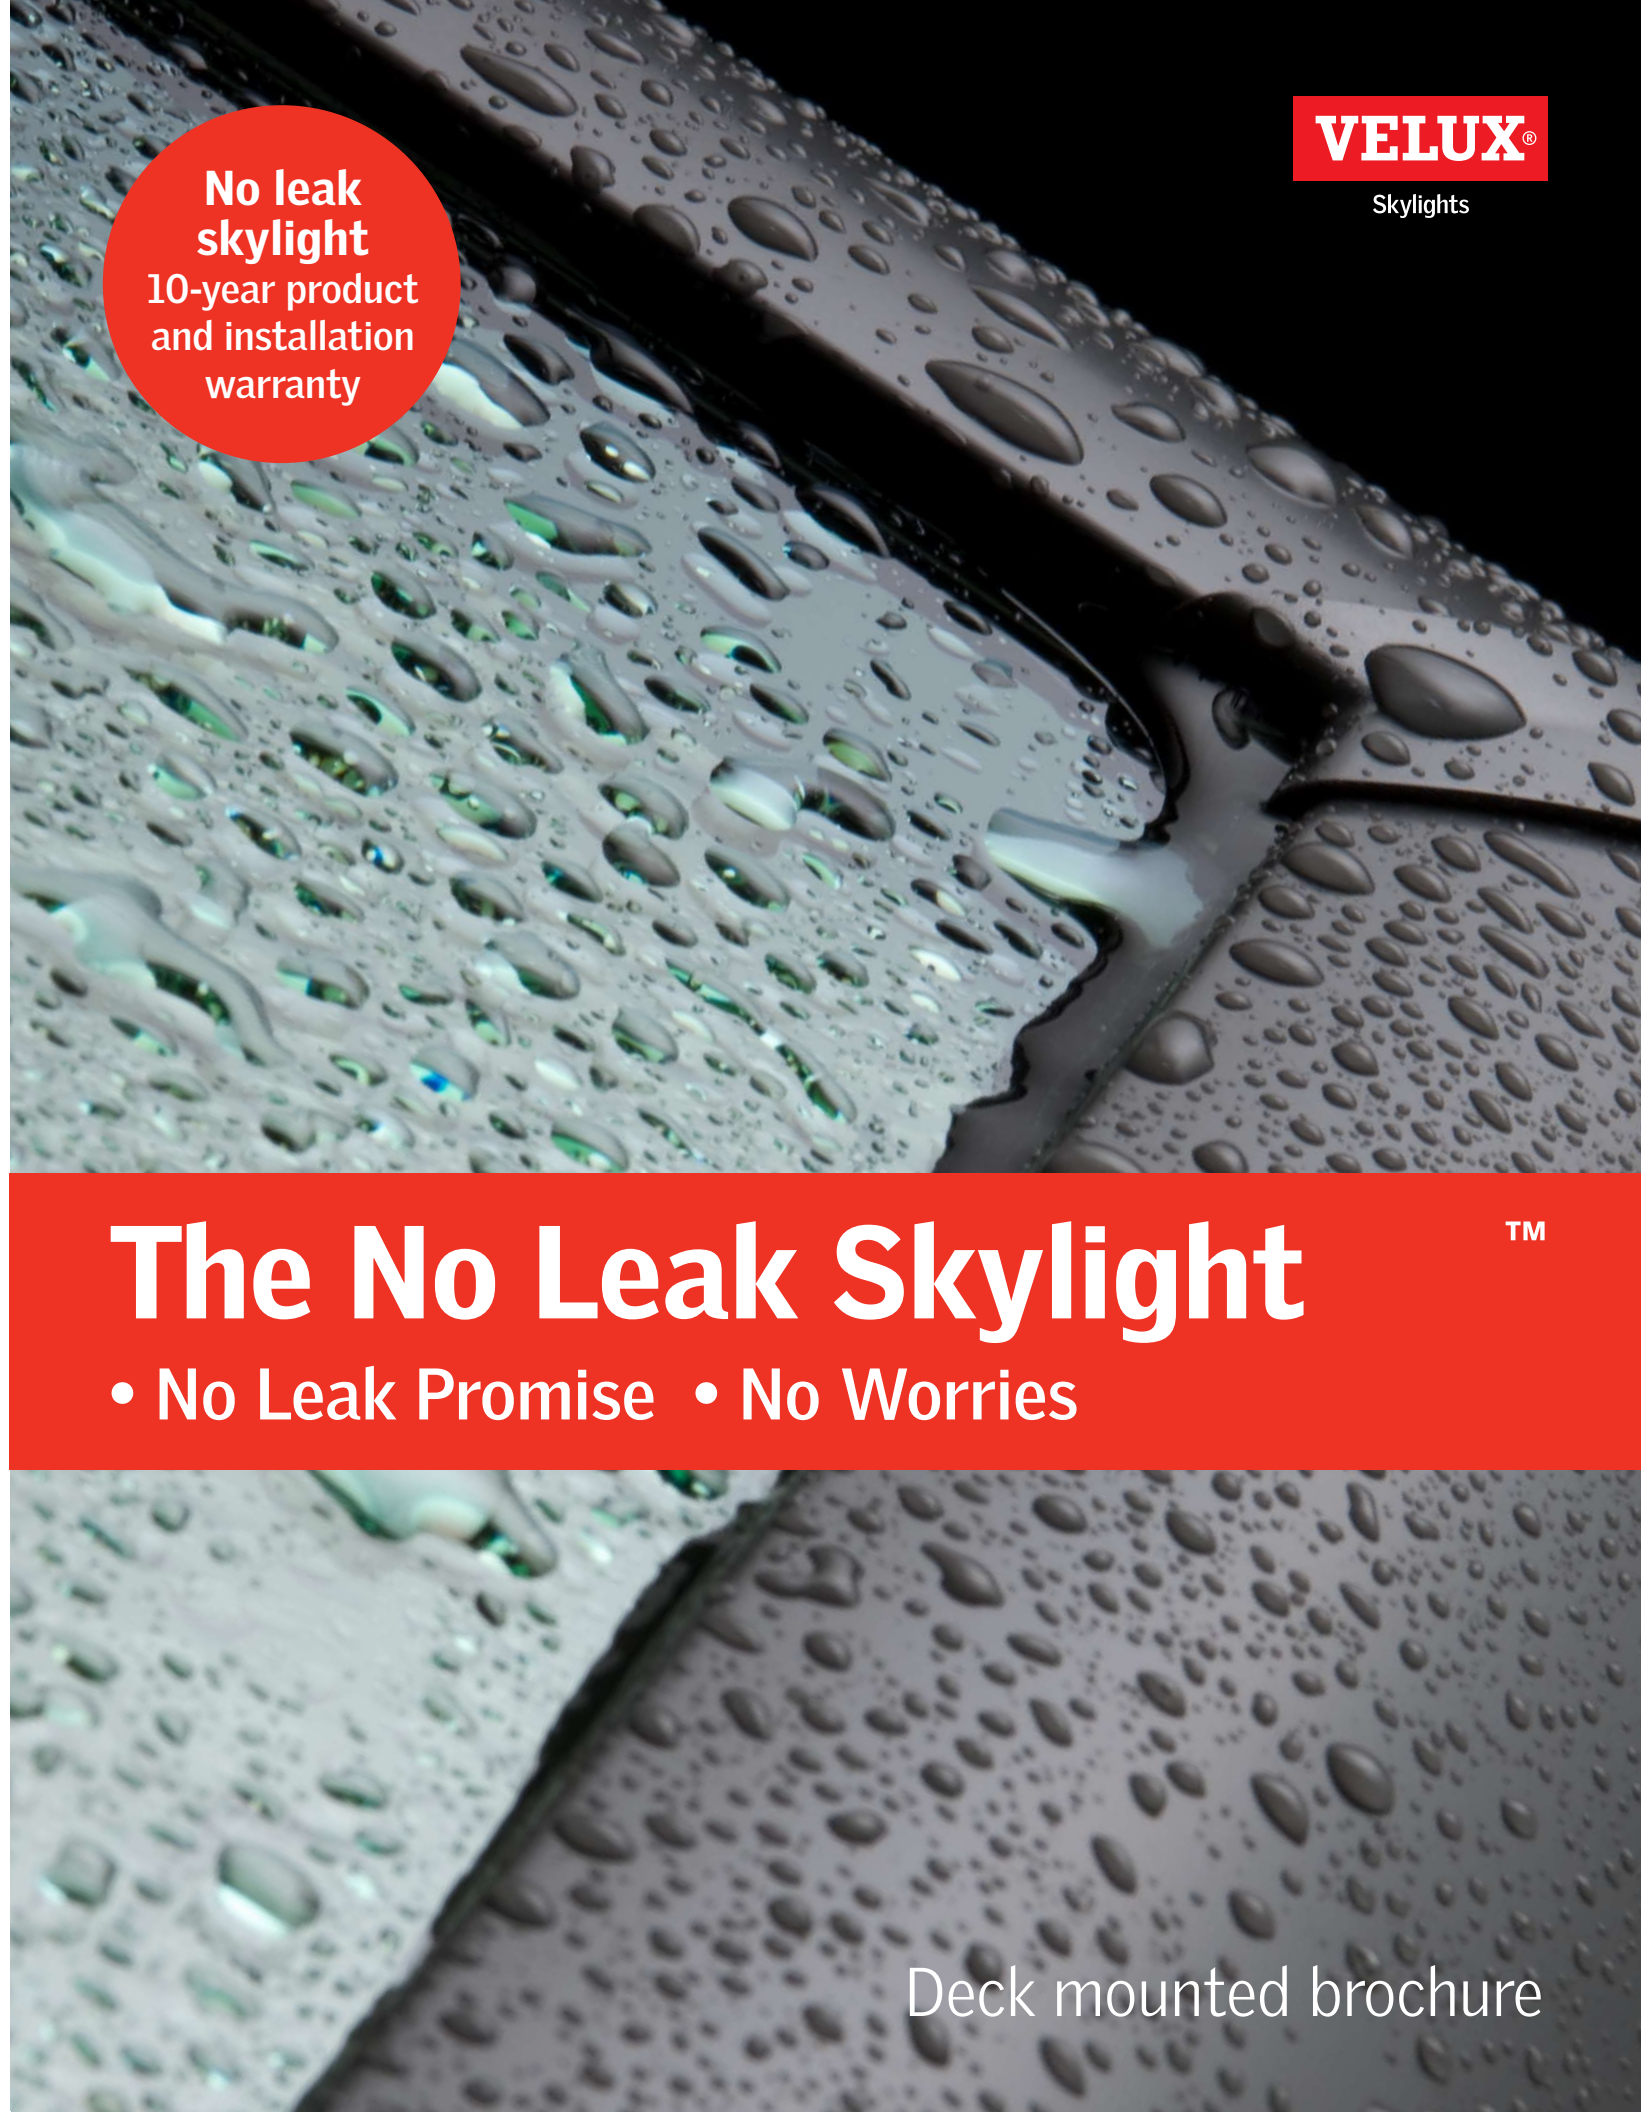

Deck mounted brochure

XUS 20192-1009
©2009 VELUX Group
VELUX, VELUX logo are registered trademarks



VELUX introduces "The No Leak Skylight"

Features include a third layer of water protection – advanced LoE3 glass for better energy efficiency, higher visible light transmittance, and improved solar heat gain performance – pre-finished frames and sashes to eliminate the need for secondary high-cost trips by a painter – pre-mounted brackets for quick installation of sunscreen blinds – lower roof profile with an updated curved architectural design – and a neutral gray color, preferred by consumers and builders, to blend with most roof materials and colors. The redesigned deck mounted product family now carries the new 10-year installation warranty plus 20 years on glass, 10 years on skylights, and five years on blinds and controls.



Models VSE, VS, FS Features



Externally mounted rain-sensor.



Self programming RF remote with advanced control options.

Other features:

The pre-attached perimeter flange with a durable, closed-cell foam gasket seals tight to the roof decking.

Tighter rough opening, for a warmer installation.

Advanced silicone glazing sealant around glass and frame connection is impervious to water and air and will last the life of the skylight.

Positioning notches built into the Deck Seal provide a simplified alignment method that can be performed on the roof.

Unique condensation gutters and gaskets are incorporated into the skylight to catch and channel condensation out of the home.

Venting electric skylights comes with 20 feet of standard wire.



Superior LoE3 Glass

Advanced LoE3 coating provides more daylight and better heat control for year-round comfort and energy savings.


- Visible light transmittance improves 10%.
- Solar heat gain improves 20%.



Patent-pending VELUX, "Deck Seal" provides an air and water barrier for a leak proof installation. The 1/4" flange/bracket sits directly on the roof deck with no gaps.



Pre-mounted **Pick&Click!** system brackets make the installation of sunscreen blinds a snap.



Factory pre-finished white frames and sashes provide for a high quality finish that eliminates the need for secondary high cost trips by a painter.



Factory installed operators for venting and venting electric skylights eliminate the need for field-installed operators and multiple wire connections.



Mortise and tenon joints for stability in the frame.



Corner key design closes perceived water hazard.



No cladding screws and only one piece to remove during installation for less time and greater simplicity while installing the skylight on the roof.



Blackout blind blocks the light



Roller blind diffuses the light



Venetian blind style and comfort